

Mechanical Properties

Cells	6 x 10
Cell Vendor	LG
Cell Type	Monocrystalline / N-type
Cell Dimensions	161.7 x 161.7 mm
Cell Colour	Black/Blue (Similar to Pantone PMS 5004)
# of Busbar	30 (Multi Ribbon Busbar)
Dimensions (L x W x H)	1700 x 1016 x 40 mm
Front Load (test)	5400 Pa
Rear Load (test)	4000 Pa
Weight	17.5 kg
Connector Type	Genuine MC4, IP68 (Male: PV-KST4) (Female: PV-KBT4)
Junction Box	IP68 with 3 bypass diodes
Length of Cables	2 x 1000 mm
Front cover	High transmission tempered glass
Frame	Anodised aluminum with protective black coating

Certifications and Warranty


Certifications	ISO 9001, ISO 14001, ISO 50001
	IEC 61215-1/-1-1/2:2016, IEC 61730-1/2:2016, UL1703
	OHSAS 18001
Module Fire Performance	Type 1 (UL 1703), Class C (UL 790, ULC/ORD C 1703)
Product Warranty	25 Years
Output Warranty of Pmax (Measurement Tolerance ± 3%)	Linear Warranty ¹

¹a) After first year: 98%, b) After second year: 0.3% annual degradation, c) 25 years: 90.8%


Temperature Characteristics

NMOT ²	44 ± 3 °C
Pmax	-0.30 %/°C
Voc	-0.24 %/°C
Isc	0.037 %/°C

Current – Voltage characteristics at various irradiance levels

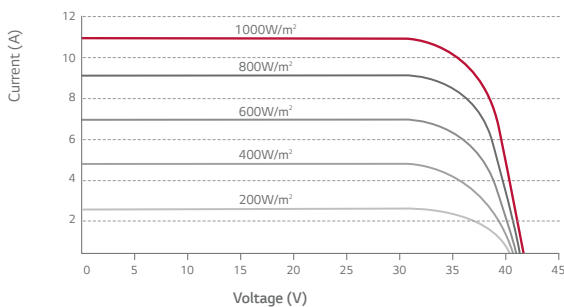

Current – Voltage characteristics at various cell temperatures

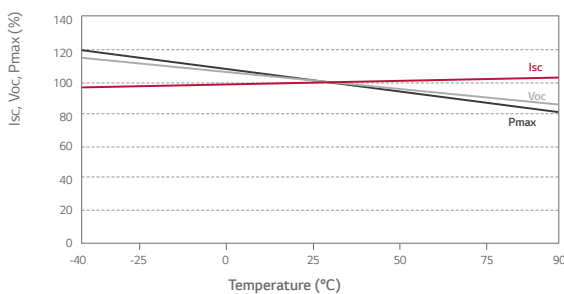

Electrical Properties (STC²)

Module Type	330 W
Maximum Power Pmax (W)	330
MPP Voltage Vmpp (V)	35.2
MPP Current Imp (A)	9.38
Open Circuit Voltage Voc (V)	42.5
Short Circuit Current Isc (A)	10.73
Module Efficiency (%)	19.1
Operating Temperature (°C)	-40 ~ +90
Maximum System Voltage (V)	1000
Maximum Series Fuse Rating (A)	20
Power Tolerance (%)	0 ~ +3


²STC (Standard Test Condition): Irradiance 1000 W/m², Module Temperature 25 °C, AM 1.5.
The nameplate power output is measured and determined by LG Electronics at its sole and absolute discretion.

Electrical Properties (NMOT³)

Module Type	330 W
Maximum Power Pmax (W)	248.4
MPP Voltage Vmpp (V)	35.1
MPP Current Imp (A)	7.08
Open Circuit Voltage Voc (V)	40.0
Short Circuit Current Isc (A)	8.65

³NMOT (Nominal Module Operating Temperature): Irradiance 800 W/m², ambient temperature 20 °C, wind speed 1 m/s, Spectrum AM 1.5.

Dimensions (mm)

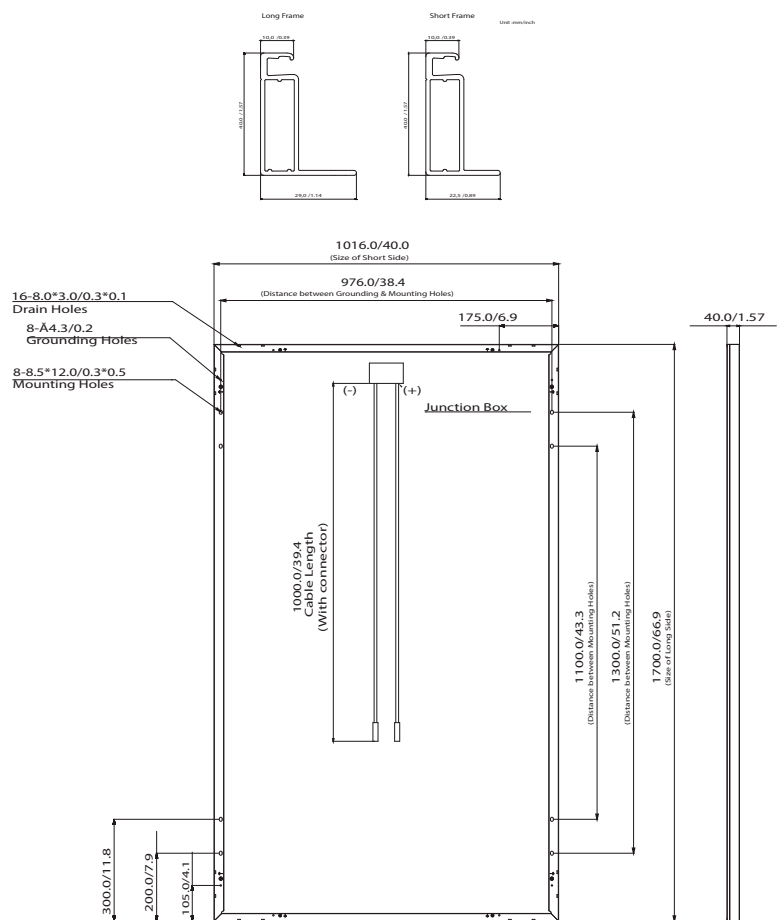

LG Electronics Australia Pty Ltd
Solar Business Group
2 Wonderland Drive, Eastern Creek, NSW 2766
Ph: 1300 152 179
E-Mail: solar.sales@lge.com.au
www.lgenergy.com.au

LG Electronics Inc.
Solar Business Division
Twin Building, Western Tower, 11F,
128, Yeouui-daero, Yeongdeungpo-gu,
Seoul, 07336, Korea
www.lg.com/global/business

Product specifications are subject to change without prior notice.
Date: 08/2019

Copyright © 2019 LG Electronics.
All rights reserved.

